

GreenBridge

The HUB

400 series



A fraction of the cost.

Powered by Windows Server 2016



GreenBridge Cut capital costs 75%

THE PROBLEM

The cloud offers huge promise for retailers and service-based enterprises, but thin clients are costly, with underwhelming performance.

THE SOLUTION

High performance virtualization at 1/4 the cost of conventional thin clients. Seamless integration with Microsoft enterprise-class software. Automatic failover for full redundancy.

 \bigcirc





Benefits

START

Cost effective. 75% savings vs. conventional thin clients, 90% savings vs PCs.

Proven. Currently in use in 100,000s of terminals. Expertise from the creators of MultiPoint Server.

> Green IT solution with substantial energy savings.

Ideal for **high-demand** environments. No moving parts; can be sealed water-tight. Reliable. Plug and play for retailers/POS, including barcode scanners & peripherals.

BENEFITS

Perfect for all customer applications: retail, food/beverage, hospitality, banks, training & call centers.


Efficient. Full redundancy and auto-failover capabilities for 99.999% uptime capability.

USB over gigabit Ethernet technology delivers fastest, highest quality video performance.

START

The Specs

Green Bridge

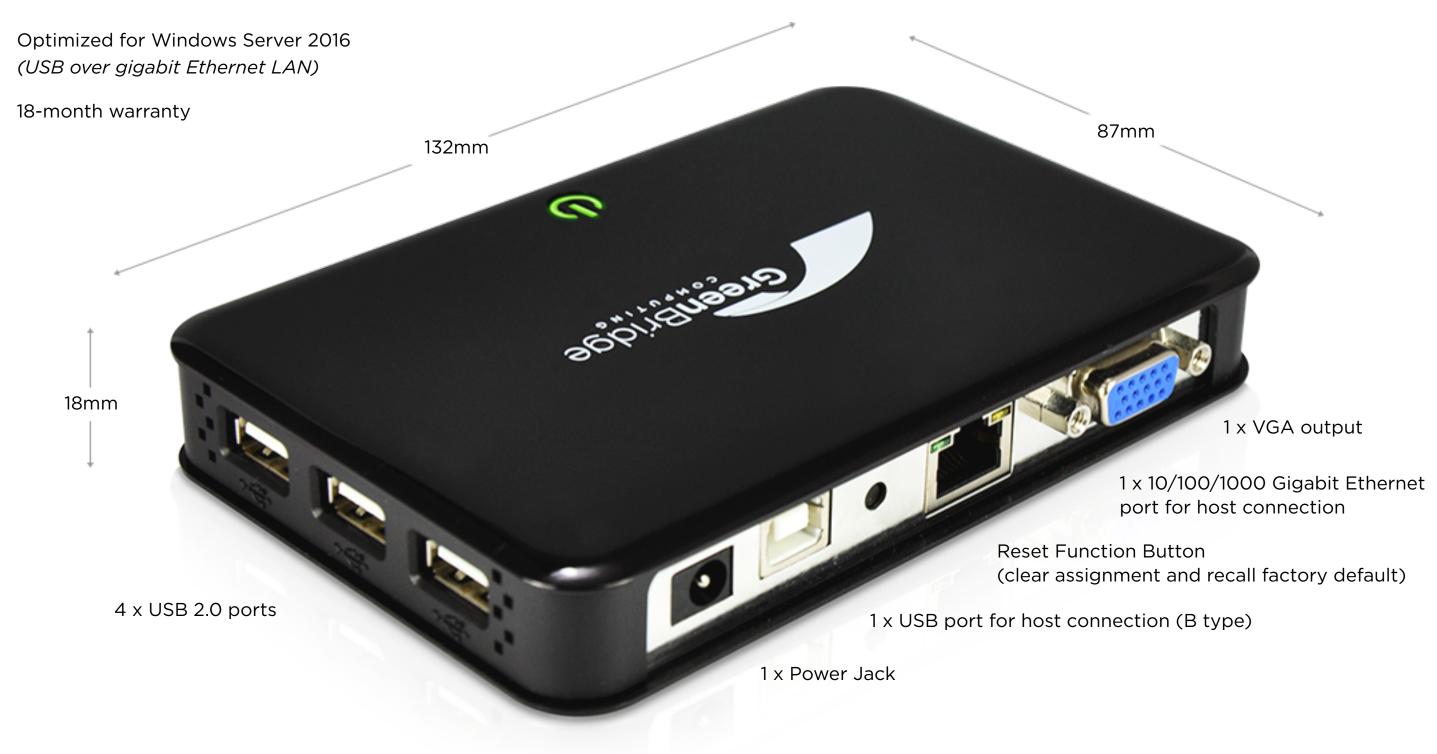

 $\langle\rangle$

START



characteristics

Shipping weight

Technical Specs

Width: 132mm (5.20 inches)

Depth: 87mm (3.43 inches)

145g (0.32 lbs)

Server OS	Windowss Server 2016	Power	Worldwide auto-sensing 100-240 VAC, 50/60 Hz. power supply
I/O peripheral	One VGA (DB-15)		Average power usage with device connected
support	Four USB 2.0 ports (1 on left side, 3 on right side)		to 1 keyboard with 1 mouse and 1 monitor:
•	One Mic In / One Line Out USB keyboard (not included)		less than 3 Watts
0	USB mouse (not included)	Temperature range	Vertical position: 50° to 104° F (10° to 40° C)
Networking	Gigabit Ethernet Port for USB over Ethernet host connection	Humidity	20% to 80% condensing
0	(recommended option for networked environments) - or -		10% to 95% non-condensing
	Optional USB in (included) to connect to host computer	Safety	German EKI-ITB 2000, ISO 9241-3/-8
0	(note: this option has a distance limitation of 5 meters)	certifications	cULus 60950, TÜV-GS, EN 60950
			FCC Class B, CE, C-Tick
Display	Up to 1680 x 1050 @ 60Hz / 32bits		WEEE, RoHS compliant
•	or 1600 x 1200 @ 60Hz / 32bits		Energy Star® compliant
Audio	Output: 1/8-inch mini jack, full 16 bit stereo	Warranty	3 years limited hardware warranty
	Input: 1/8-inch mini jack, 8 bit microphone		
Physical	Height: 18mm (0.71 inches)		

START

Our Story

In 2010, David Yunger left a career as a senior manager at Microsoft to find a better bridge to the cloud.

At Microsoft, David launched Windows MultiPoint Server software delivering the benefits of virtualization at a fraction of the cost. What he discovered: cloud hardware was both expensive - and underperformed users' expectations.

In collaboration with the Microsoft Retail Experience Center, Mr. Yunger discovered that retailers and hospitality industry customers were hungry for a simple, efficient, reliable, and low-cost means to deliver a high-performing POS solution. Together, we unveiled THE HUB.

Our solutions are in action in hundreds of thousands of terminals across the US and in more than a dozen countries worldwide. We deliver all the richness of world-class cloud hardware, at a tiny fraction of the cost of conventional thin clients. We look forward to serving you!

David and the GreenBridge team

Let's get in touch.

EMAIL

thehub@msmultipoint.com

PHONE

(425) 455-8601

msmultipoint.com

